TOPDECK



PROVENANCE

Contents

DISCOVER TOPDECK PROVENANCE 03 — 05

Provenance 03

Provenance at a glance 04

Provenance in the specification 05

AUSTRALIAN SPECIES 06 — 13

Spotted Gum 07

Blackbutt 08

Grey Ironbark 09

Jarrah 10

Brush Box 11

Sydney Blue Gum 12

Tasmanian Oak 13

PACIFIC SPECIES 14 — 17

Pacific Spotted Gum 15

Pacific Blackbutt 16

Technical Specifications — Plank 17

HERRINGBONE 18 — 21

Spotted Gum 19

Blackbutt 20

Technical Specifications — Herringbone 21

DOWNLOADS · ELSEWHERE 22 — 23

02



CHAPTER 02 — ENGINEERED TIMBER

PROVENANCE

AT A GLANCE

Australian species, engineered for the working program.

Seven Australian hardwoods and two Pacific-grown boards. Two of the nine are available in both plank and herringbone.

09 SPECIES Seven Australian, two Pacific-grown	03 SECTIONS Australian · Pacific · Herringbone	3MM WEAR LAYER Sawn hardwood veneer, re-sandable
14MM PROFILE On an 11mm multi-ply core	09 LAYERS OF LACQUER Treffert — ultra matte, matte, semi-gloss	P3 SLIP RATING AS 4586 · fire CHF 3.5 kW/m²

IN THE SPECIFICATION

The hardwood the drawing asks for. A core the program can schedule.

Provenance is Australian species, engineered.

Each board carries a 3mm sawn hardwood veneer — the same species, grade, and surface a solid floor presents — bonded to an 11mm multi-ply core. The construction holds flatter across wider boards and larger slabs than solid section, installs over hydronic heating, and locks with a 5G click profile that removes the trowel from most programs.

Seven Australian species and two Pacific-grown boards, in two plank widths and a herringbone. The surface is finished with nine layers of Treffert lacquer at the factory; the 3mm wear layer accepts re-sanding when the first service life is done.

TRADE ENQUIRY →

SPECIES	Seven Australian hardwoods, two Pacific-grown
CONSTRUCTION	3mm hardwood veneer · 11mm multi-ply core
THICKNESS	14mm overall
FORMATS	Plank 1900 × 136 / 1900 × 190 Pacific plank 1820 × 122 · Herringbone 600 × 120
GRADE	Standard & Better (Pacific species: AB)
FINISH	9 layers Treffert lacquer Ultra matte · matte · semi-gloss by product
LOCKING	5G click · Pacific species tongue & groove
WEAR LAYER	3mm sawn hardwood veneer
WARRANTY	Lifetime structural · 5 / 3 yr coating
PRICE TIER	On application — trade only



SECTION 01

Australian Species

1900mm planks, two widths. Seven species.

SPOTTED GUM — PLANK 190

AUSTRALIAN SPECIES — 01

Spotted Gum

Light to mid-brown with grey-green undertones and bold grain variation

JANKA 11.0 KN
WEAR 3MM
AUSTRALIA

The signature Australian hardwood, engineered — pale grey-green through mid-brown, often within a single board, under nine layers of Treffert ultra matte lacquer. Bold grain that patterns the room without repetition.





FORMATS

ALSO IN HERRINGBONE — P19 →

Plank 136	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-SG-136
Plank 190	1900 × 190 × 3/14mm	2.166m² · 6 pcs	TD-PRV-SG-190

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

AUSTRALIAN SPECIES — 02

Blackbutt

Warm honey through to creamy nutty-brown tones

JANKA 9.1 KN
WEAR 3MM
AUSTRALIA

Blackbutt's even honey tone is the range's working default — the species specifiers reach for when the joinery, not the floor, is doing the talking. Two widths, one register.





FORMATS

ALSO IN HERRINGBONE — P20 →

Plank 136	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-BB-136
Plank 190	1900 × 190 × 3/14mm	2.166m² · 6 pcs	TD-PRV-BB-190

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

AUSTRALIAN SPECIES — 03

Grey Ironbark

Deep brown to charcoal with pronounced grain

JANKA 14.0 KN
WEAR 3MM
AUSTRALIA

The hardest surface in the range, and its darkest — deep brown to charcoal, pronounced grain, built for floors that carry traffic as a load case. Matte or ultra matte at the 136 width.





FORMATS

Plank 136 · Matte	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-GIB-MA-136
Plank 136 · U. Matte	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-GIB-UM-136
Plank 190	1900 × 190 × 3/14mm	2.166m² · 6 pcs	TD-PRV-GIB-190

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

AUSTRALIAN SPECIES — 04

Jarrah

Deep red through to dark blood-red, deepening with age

JANKA 8.5 KN
WEAR 3MM
AUSTRALIA

The Western Australian icon — deep red, deepening rather than fading under UV. Specifiers pair it against pale walls and let the floor set the room's temperature. Matte or ultra matte at the 136.





FORMATS

Plank 136 · Matte	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-JR-MA-136
Plank 136 · U. Matte	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-JR-UM-136
Plank 190	1900 × 190 × 3/14mm	2.166m² · 6 pcs	TD-PRV-JR-190

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

AUSTRALIAN SPECIES — 05

Brush Box

Soft pinkish-brown with fine, even grain

JANKA 9.5 KN
WEAR 3MM
AUSTRALIA

The quiet species of the range — soft pinkish-brown, fine and even in grain, with minimal feature. Where spotted gum performs, brush box recedes, holding one tone across a large plan.





FORMATS

Plank 136	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-BRB-136
Plank 190	1900 × 190 × 3/14mm	2.166m² · 6 pcs	TD-PRV-BRB-190

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

AUSTRALIAN SPECIES — 06

Sydney Blue Gum

Light pinkish-red with soft brown feathering through the grain

JANKA 9.4 KN
WEAR 3MM
AUSTRALIA

A coastal hardwood with a warmer register than blackbutt and a quieter one than jarrah — soft brown feathering that reads at close range and settles to an even warmth.





FORMATS

Plank 136	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-SBG-136
Plank 190	1900 × 190 × 3/14mm	2.166m² · 6 pcs	TD-PRV-SBG-190

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

AUSTRALIAN SPECIES — 07

Tasmanian Oak

Pale straw through to soft warm honey

JANKA 6.0 KN
WEAR 3MM
AUSTRALIA

The lightest surface in the range, in both senses — pale straw through soft warm honey, layered across each board. Brightens a plan while keeping the specification Australian.





FORMATS

Plank	1900 × 136 × 3/14mm	1.5504m² · 6 pcs	TD-PRV-TO

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.



SECTION 02

Pacific Species

1820mm planks. Two Pacific-grown boards.

PACIFIC BLACKBUTT — PLANK

PACIFIC SPECIES — 01

Pacific Spotted Gum

Mid-brown with subtle grey undertones

JANKA 11.0 KN
WEAR 3MM
PACIFIC ISLANDS

The greyer of the two Pacific-grown boards — spotted gum's hardness with a tighter grain and narrower tonal band. AB grade, semi-gloss, tongue and groove.





FORMATS

Plank · T&G	1820 × 122 × 3/14mm	1.7763m² · 8 pcs	TD-PRV-PSG

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

PACIFIC SPECIES — 02

Pacific Blackbutt

Golden honey with subtle pinkish hues

JANKA 11.8 KN
WEAR 3MM
PACIFIC ISLANDS

The warmer of the two Pacific-grown boards — golden honey touched with pink, a clean even grain. Where its sibling runs grey, Pacific Blackbutt runs warm. AB grade.





FORMATS

Plank · T&G	1820 × 122 × 3/14mm	1.7763m² · 8 pcs	WLC-PBB-AB

TECHNICAL SPECIFICATION

PLANK — P17 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

PLANK

The species in the wear layer. The program in the core.

PERFORMANCE

HARDNESS	Per species — refer to each species page
WEAR LAYER	3mm sawn hardwood veneer. Accepts re-sanding and re-coating
FIRE RATING	CHF 3.5 kW/m² (AS ISO 9239.1)
SLIP RATING	P3 (AS 4586)
VOC	E1 (test report)

CONSTRUCTION

DIMENSIONS	1900 × 136 × 3/14mm 1900 × 190 × 3/14mm Pacific species: 1820 × 122 × 3/14mm
CORE	11mm multi-ply
GRADE	Standard & Better (Pacific species: AB)
EDGE	Micro bevelled
LOCKING	5G click (Pacific species: tongue & groove)
FINISH	9 layers Treffert lacquer — ultra matte standard, matte (GIB / JR 136), semi-gloss (PSG)

ASSURANCE

STRUCTURAL	Lifetime Structural Warranty *
COATING	5 Years Residential 3 Years Commercial
CONTAINS	Plank 136 — 1.5504m² / 6pcs Plank 190 — 2.166m² / 6pcs Pacific species — 1.7763m² / 8pcs
NOTES	* Full details, terms, and conditions available on request or via the official warranty documents

TRADE ENQUIRY →



SECTION 03

Herringbone

600 × 120mm blocks. Two species.

SPOTTED GUM — HERRINGBONE


HERRINGBONE — 01

Spotted Gum

Light to mid-brown with grey-green undertones and bold grain variation

JANKA 11.0 KN
WEAR 3MM
AUSTRALIA

The signature species in a European pattern — at 600 × 120mm the block is scaled so the tonal range reads across the geometry. The floor patterns twice: the layout, then the species.

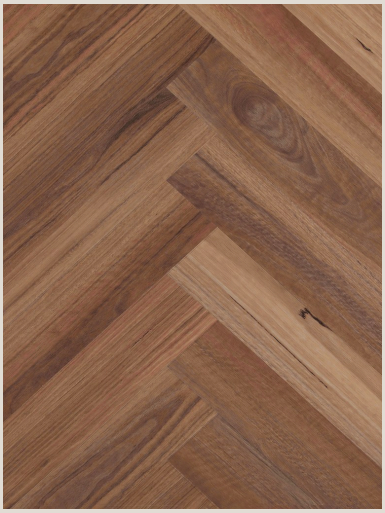



FORMATS

ALSO IN PLANK — P07 →

Herringbone	600 × 120 × 3/14mm	1.44m² · 20 pcs	TD-PRV-H-SG

TECHNICAL SPECIFICATION

HERRINGBONE — P21 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.


HERRINGBONE — 02

Blackbutt

Warm honey through to creamy nutty-brown tones

JANKA 9.1 KN
WEAR 3MM
AUSTRALIA

The steadier of the two herringbone offers — the pattern supplies the movement, the species holds the colour. Spotted gum herringbone reads as figure; blackbutt reads as texture.

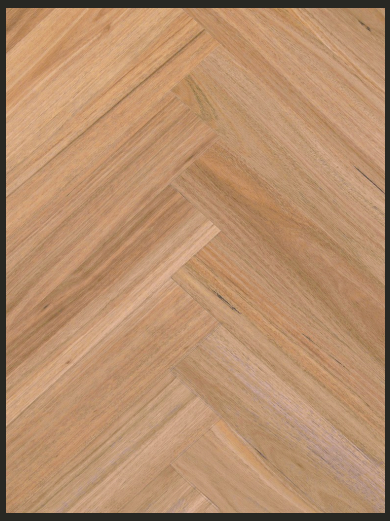



FORMATS

ALSO IN PLANK — P08 →

Herringbone	600 × 120 × 3/14mm	1.44m² · 20 pcs	TD-PRV-H-BB

TECHNICAL SPECIFICATION

HERRINGBONE — P21 →

As timber is a natural product, colour, pattern and texture may vary from the representations shown in electronic or printed media.

HERRINGBONE

Two species, one block. The geometry does the rest.

PERFORMANCE

HARDNESS	Per species — refer to each species page
WEAR LAYER	3mm sawn hardwood veneer. Accepts re-sanding and re-coating
FIRE RATING	CHF 3.5 kW/m² (AS ISO 9239.1)
SLIP RATING	P3 (AS 4586)
VOC	E1 (test report)

CONSTRUCTION

DIMENSIONS	600 × 120 × 3/14mm
CORE	11mm multi-ply
GRADE	Standard & Better
EDGE	Micro bevelled
LOCKING	5G click
FINISH	9 layers Treffert ultra matte lacquer

ASSURANCE

STRUCTURAL	Lifetime Structural Warranty *
COATING	5 Years Residential 3 Years Commercial
CONTAINS	1.44m² / 20pcs
NOTES	* Full details available on request or via the official warranty documents

TRADE ENQUIRY →

Provenance is Australian timber, engineered. The species carries the room; the core carries the program.

The documents that follow the brochure.

Provenance Specification Sheet
PDF



Installation Guide
PDF



Care and Maintenance
PDF



Fire Test Report — CHF 3.5 kW/m²
PDF · AS ISO 9239.1



Slip Resistance — P3
PDF · AS 4586



VOC Emissions — E1
PDF



QR CODES ENCODE TOPDECKFLOORING.COM.AU/COLLECTIONS/PROVENANCE — GENERATE IN CANVA AT 25 × 25MM

Provenance is the Australian register. The rest of the line is elsewhere.




HERITAGE



RHINE



PANTORA

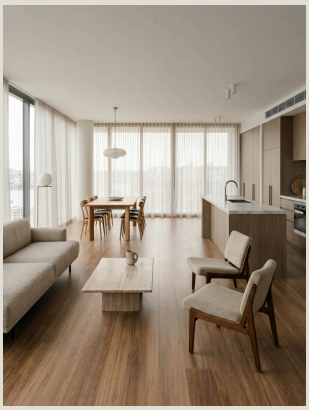

CORE

TRADE ENQUIRY

Specify, sample, and price the Provenance range.

TRADE@TOPDECKFLOORING.COM.AU →

+61 2 9748 2288

FIND A STOCKIST

Twelve showrooms across Australia and New Zealand.

TOPDECKFLOORING.COM.AU/STOCKISTS →

TOPDECK FLOORING

16 Salisbury Street, Silverwater NSW 2128 · +61 2 9748 2288 · info@topdeckflooring.com.au · topdeckflooring.com.au

© 2026 Topdeck Flooring. No part of this brochure may be reproduced without permission.