

Prime *Platinum Edition*



Dyna Core[®]

48 hours | 360° Water Proof Warranty*

**conditions apply refer to Prime Platinum Edition Warranty.*




TOPDECK FLOORING

Dyna Core[®] Water Resistant Laminate Flooring is no longer a dream


Dyna Core[®], a brand new laminate option exclusive to Topdeck, is a water resistant laminate which feels like authentic hardwood.

Dyna Core[®] is ideal for all rooms in the house, including kitchens, basements, living rooms, fitness rooms and many more.

- Dimensions:
2200mm long X 196mm wide X 12.3mm thick
- Box Contains:
5 Planks = 2.156sqm
- Box Weight: 23kg
- Abrasion Class AC5
(Highly Scratch Resistant)

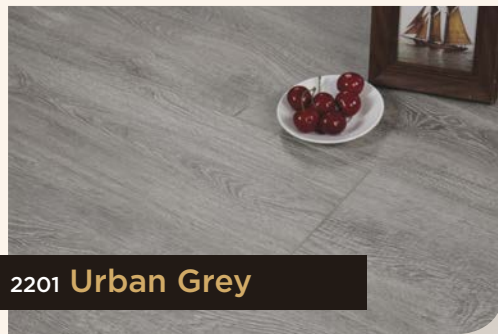

2201 **Urban Grey**

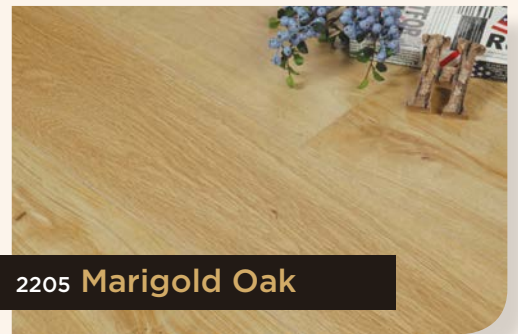


2205 **Marigold Oak**


- Environmentally Friendly
VOC E0
- Micro Beveled Edge
- Rigid: up to 950kg/m³
- Superior Water Resistant
Performance
- Install up to 32m Without
Transitions
- EIR Surface
- Waxing: Double Protection
- FloorScore, Carb Phase2,
SCS Certified



2202 **Corona White**

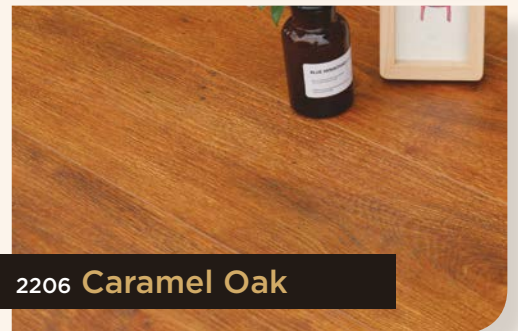


2206 **Caramel Oak**

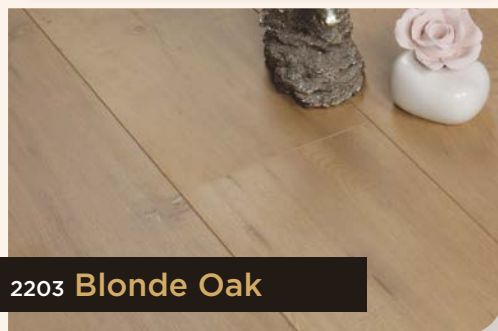


2203 **Blonde Oak**



2207 **Spotted Gum**

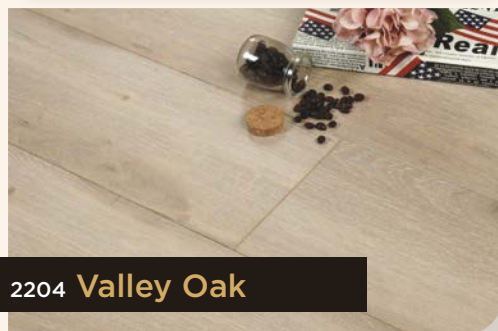

2204 **Valley Oak**

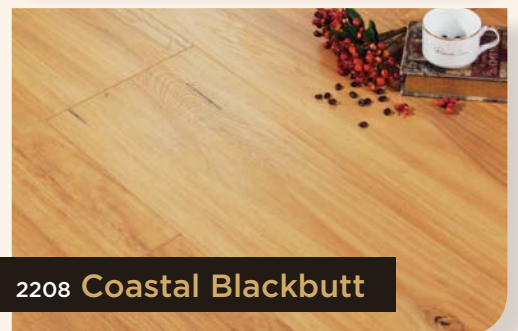

2208 **Coastal Blackbutt**

Proud to be a Member of the

atfa
Australian timber flooring association

PRIME PLATINUM EDITION TECHNICAL SPECIFICATIONS



EN
EN13329

E0
DIN EN120

B1

ISO9001

ISO14001



AC5

DIMENSIONS

2200mm x 196mm x 12.3mm
Pack: 2.156m²/box

INSTALLATION METHOD

Floating Floor (5G Licensed Click System)

SLIP RATING

AS 4586 (2013) Slip Resistance Classification of New Pedestrian Surface Materials
Appendix A - Wet Pendulum Test
Achieved a pass of P2

FIRE RATING

Critical Heat /Radiant Flux (CHF)
(AS ISO 9239.1) Pass the AS ISO 9239.1 Standard as required by the Australian National Construction Code

ABRASION CLASS

AC33 = AC5 refers to the EU Standard for the Wear Layer Scratch Resistance
AC5 - Laminate can Withstand any Type of Heavy Residential Traffic

PRODUCTION METHODS

German Manufacturing Technology

ENVIRONMENTAL & QUALITY CERTIFICATES

E0 Formaldehyde Emission EN ISO 9001, ISO 14001

WARRANTY

25 Years Structure (Please Refer to Prime Laminate Warranty Paper)

- 1 Aluminium Oxide Protective Wear Layer
- 2 Decorative Photographic Design
- 3 Super High Density Fibre (Super HDF) Dyna Core[®]
- 4 5G Licensed Lock System
- 5 Composite Backing Protects & Improves Structural Stability



quick and easy installation



slip resistance



glue-free installation



easy maintenance



abrasion resistance



color fastness to light



resistance to cigarette ash



warm to the touch



resistance to water



indentation resistance



static resistance



high elasticity

Note: Colour grain & feature patterns may vary from the actual floor to printed or virtual media.
For detail maintenance & installation guidelines please refer to the website.



Quality is our Attitude

www.topdeckflooring.com.au

Importer & Supplier of Quality Floor Boards



TOPDECK FLOORING

Topdeck International Pty Ltd

16 Salisbury Street, Silverwater, NSW 2128 Australia

Phone: 02-9748 2288 | Fax: 02-9748 2266

Email: info@topdeckflooring.com.au